



# rtc<sup>®</sup>

COUPLING TECHNOLOGY



# 034

rtc TYPE



DN 10 mm Pneumatic Coupling

TYPE 034



**Compatible - Kompatibilität**

Rectus 34KA  
Atlas Copco QIC 15

**Temperature Range - Temperaturbereich**

Nitrile (N) -20°C + 100°C (- 4°F + 212°F)  
FPM (V) -20°C + 180°C (- 4°F + 356°F)  
EPDM (Ethylene Propylene) -40°C + 150°C (- 40°F + 302°F)

**Working Pressure - Betriebsdruck**

35 Bar (510 PSI)

**Flow size - Nennweite**

rtc type 034 10 mm

**Standard version - Standardversion**

Seals - Dichtung : Nitrile (N)

**Material of Standard Coupler**

**Material für die Standardversion**

Socket body - Kupplungsgrundkörper	Brass Nickel Plated - Messing vernickelt
Sleeve - Hülse	Steel Nickel Plated - Stahl vernickelt
Springs - Federn	Stainless Steel - Edelstahl
Locking Ring - Sprengring	Stainless Steel - Edelstahl
Balls - Kugeln	Stainless Steel - Edelstahl

Plug - Nippel	Steel zinc-nickel plated - Stahl Zink-Nickel beschichtet
------------------	---

**Technical Specifications & Advantages**


- Advantage of one hand operation.
- High performance valve with increased flow rate and minimized pressure loss.
- Corrosion resistant.

**Technische Daten und Vorteile**

- Vorteil durch Einhandbedienung.
- Ventil mit hohem Durchfluss und geringem Druckverlust.
- Korrosionsbeständig



Flow Rate vs Pressure Drop Graph

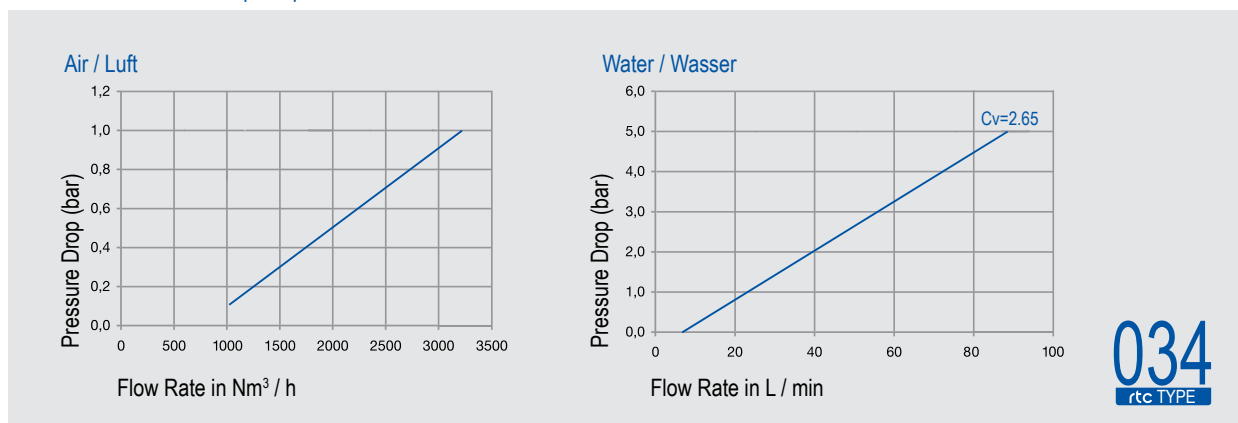

034  
rtc TYPE

**rtc** TYPE 034

Male thread socket / Kupplung mit Aussengewinde



Sockets / Kupplungen

Size / Größe

Order No / Bestellnr.

Ød


Ød1

L

L1

HEX.

10

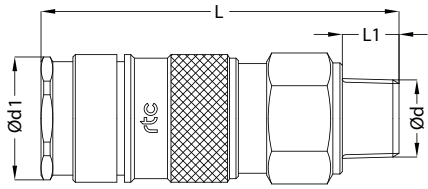

Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
034 SRO 13	BSPT 1/4	27	71	12	24
034 SRO 17	BSPT 3/8	27	71	12	24
034 SRO 21	BSPT 1/2	27	74	17	24
034 SRO 26	BSPT 3/4	27	75	19	27

**rtc** TYPE 034

Female thread socket / Kupplung mit Innengewinde



Sockets / Kupplungen

Size / Größe

Order No / Bestellnr.


Ød

Ød1

L

HEX.

10

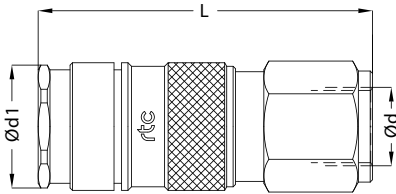

Order No / Bestellnr.	Ød	Ød1	L	HEX.
034 SFO 13	BSP 1/4	27	65	24
034 SFO 17	BSP 3/8	27	66	24
034 SFO 21	BSP 1/2	27	66	24
034 SFO 26	BSP 3/4	27	70	32

**rtc** TYPE 034

Standard hose tail socket / Kupplung mit gerader Standard - Schlauchtülle



Sockets / Kupplungen

Size / Größe

Order No / Bestellnr.


Ød

Ød1

L


L1

10

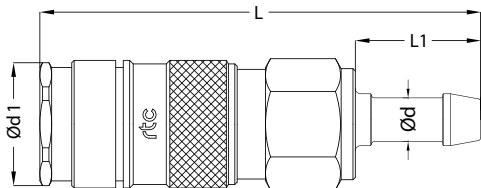


Order No / Bestellnr.	Ød	Ød1	L	L1
034 SHO 06	6 mm	27	82	23
034 SHO 08	8 mm	27	82	23
034 SHO 09	9 mm	27	82	23
034 SHO 10	10 mm	27	82	23
034 SHO 13	13 mm	27	82	23
034 SHO 16	16 mm	27	82	23
034 SHO 19	19 mm	27	87	28


Male thread plug / Nippel mit Aussengewinde TYPE 034 **rtc**

Plugs / Nippel	Size / Größe	Order No / Bestellnr. →←	Ød	Ød1	L	L1	HEX.
	10	034 PRF 13	BSPT 1/4	15	46	12	17
		034 PRF 17	BSPT 3/8	15	47	12	17
		034 PRF 21	BSPT 1/2	15	55	17	22

Female thread plug / Nippel mit Innengewinde TYPE 034 **rtc**

Plugs / Nippel	Size / Größe	Order No / Bestellnr. →←	Ød	Ød1	L	HEX.
	10	034 PFF 13	BSP 1/4	15	45	17
		034 PFF 17	BSP 3/8	15	49	19
		034 PFF 21	BSP 1/2	15	52	24

Standard hose tail plug / Nippel mit gerader Standard - Schlauchtülle TYPE 034 **rtc**

Plugs / Nippel	Size / Größe	Order No / Bestellnr. →←	Ød	Ød1	L	L1
	10	034 PHF 06	6 mm	15	54	23
		034 PHF 08	8 mm	15	54	23
		034 PHF 09	9 mm	15	54	23
		034 PHF 10	10 mm	15	54	23
		034 PHF 13	13 mm	15	54	23
		034 PHF 16	16 mm	15	57	26
		034 PHF 19	19 mm	15	59	28